


**Features:**

- Wide 2 : 1 Input Range
- Input Filter With Internal Capacitor
- Input / Output Isolation 1.5K Vdc
- Low Ripple And Noise
- 100% Burn-In
- Regulated type
- Net Weight : 4.5 g Typical
- 8 Pin DIL Package
- Custom Design Available

**Technical Specification:**

Model No.	Input Voltage (Vdc)	Output Voltage (Vdc)	Output Current (mA) Max	Input Current @No Load (mA) Typ.	Input Current @Max. Load (mA) Typ.	Output Ripple (mV) Max.	Load Regulation (%) Max.	Efficiency (%)Typ.
<b>Single Output SIL Package Style</b>								
B9-1205S2 LF	9~18	5	400	4	219	50	± 0.5	76
B9-1212S2 LF		12	167	4	209	100	± 0.5	80
B9-1215S2 LF		15	134	4	209	120	± 0.5	80
B9-2405S2 LF	18~36	5	400	4	107	50	± 0.5	78
B9-2409S2 LF		9	222	4	104	80	± 0.5	80
B9-2412S2 LF		12	167	4	104	100	± 0.5	80
B9-2415S2 LF	36~72	15	134	4	105	120	± 0.5	80
B9-4805S2 LF		5	400	4	56	50	± 0.5	75
B9-4809S2 LF		9	222	4	54	80	± 0.5	77
B9-4812S2 LF		12	167	4	54	100	± 0.5	78
B9-4815S2 LF		15	134	4	54	120	± 0.5	78

**Mechanical Dimensions:**

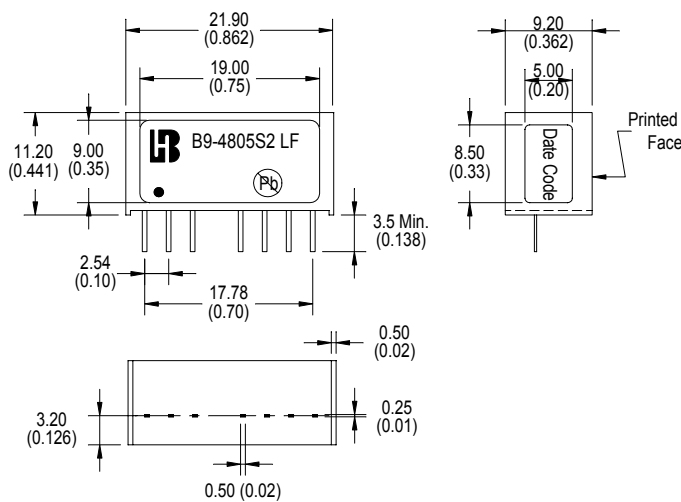

Pin	Single
1	-Vin
2	+Vin
3	Ve
4	No Pin
5	NC
6	+Vo
7	-Vo
8	Cext